

## V5 Delay pedal

### Precautions

#### PLEASE READ CAREFULLY BEFORE PROCEEDING

##### **Power supply**

Please connect the designated AC adapter to an AC outlet of the correct voltage .

Please be sure to use only an AC adapter which supplies 9V(+/-10%)DC.center minus .The maximum working voltage not exceed 12V.otherwise may be dangerous equipment damage.fire or other problems. Unplug the AC power adapter when not using or during electrical storms.

##### **Connections**

Always turn off the power of this and all other equipment before connecting or disconnecting ,this will help prevent malfunction and / or damage to other devices.

Also make sure to disconnect all connection cables and the power cord before moving this unit.

##### **Handling**

Do not apply excessive force to the switches or controls.

Do not let paper,metallic,or other objects into this unit.

Take care not to drop the unit, and do not subject it to shock or excessive pressure.

##### **Cleaning**

Clean only with a soft,dry cloth. If necessary ,slightly moisten the cloth.

Do not use abrasive cleanser,cleaning alcohol ,paint thinners,wax,solvents.

Cleaning fluids,or chemical-impregnated wiping cloths.

##### **Interference with other electrical devices**

Radios and televisions placed nearby may experience reception interference. Operate this unit at a suitable distance from radios and televisions.

##### **Location**


To avoid deformation,discoloration,or other serious damage,do not expose this unit to the following conditions;

.Direct sunlight	.Heat sources
.Magnetic fields	.Extreme temperature or humidity
.Excessive dusty or dirty location	.High humidity or moisture
.Strong vibration or shocks	

## Main features

- .Very similar to analog delay, Warm, vintage delay sound
- .Full metal shell
- .Very small and exquisite
- .True bypass
- .DC 9V Adapter power supply

## Panel instruction

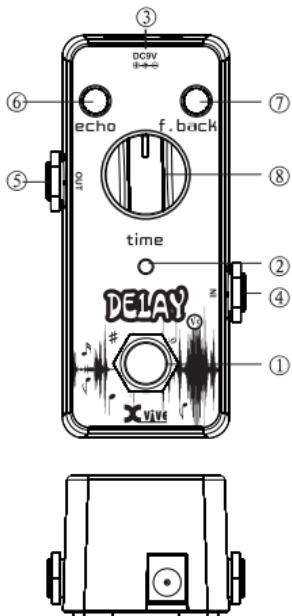

### 1.TRUE BYPASS Footswitch:

Push down the footswitch to switch between effects and bypass status.

### 2.ON/OFF LED:

Instructs effects or bypass status of V5, when the LED is lit up, the effects is on

### 3.DC IN Power Jack:

For power supply, use a 9-volt DC regulated AC adapter(plug polarity is positive on the barrel and negative in the center)

### 4.INPUT Jack:

1/4" mono audio jack. For connecting guitar

### 5.OUTPUT Jack:

1/4" mono audio jack, outputs the signal

### 6.ECHO Knob:

Adjust the level of delay effects

### 7.F.BACK Knob:

Adjust the feedback of delay effects.

### 8.TIME Knob:

Adjust the delay time

## Specifications

Delay Time: 25mx-600mx

Input: 1/4" monaural jack (impedance: 470k Ohms)

Output: 1/4" monaural jack (impedance: 470 Ohms)

Power Requirements: AC adapter. 9V DC (center minus plug)

Current Draw: 40mA

Dimension: 46 (W) \*94 (D) \*50 (H) mm

Accessories: Owner's Manual



[www.xviveaudio.com](http://www.xviveaudio.com)

Disclaimer: Any specification's update won't be amended in this manual