

User Manual

CRYSTAL Overdrive

Thank you for purchasing this product. Please read the user manual carefully before using

I. Precautions

1. Do not disassemble, repair or refit the device to avoid damages.
2. Do not use or put this device under high temperature humidity , or at any place with dirt or violent shaking.
3. Do not drop this device or hit it on the hard surface to avoid damages.
4. Do not clean this device with any detergent or alcohol to avoid damages.
5. Remove the power cable if this device is not used for a long time.
6. Please connect DC9V  with this device.
7. Be sure to turn off the power and other devices before Connecting or disconnecting with this device.

II. Performance Description


1. CRYSTAL is a dynamic and delicate overload, showing the details of the river in hand to the fullest. At the same time gain adjustment range is super wide, turn the GAIN knob, you can clear the fader from BOOST type all the way to the distortion state, the effect of high gain, can be in a very clear, rich state performance.
2. Low power consumption current supply.
3. All aluminum metal shell, lightweight and compact.
4. True By pass switching Design .

III. Use Description

- **OUTPUT:** 1/4" mono output interface, connect other effects, amps and other equipment.
- **INPUT:** 1/4" mono input interface, connect other effects, guitars and other devices.



IV. Panel Description

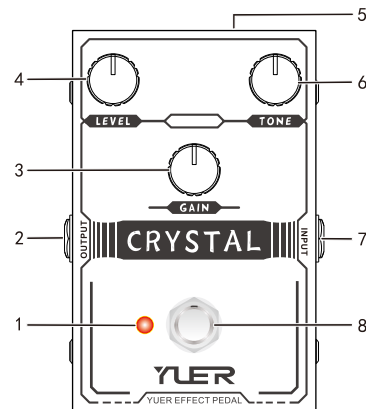

1. LED indicator, the light is on when the device starts to work.
2. **OUTPUT** output interface, 1/4" mono audio interface, connect other effects, speakers and other equipment.
3. **GAIN** knob, Adjust the gain effect.
4. **LEVEL** knob, adjust the output level.
5. Power interface: DC9V (external positive and internal negative).
6. **TONE** knob, Adjust the Tone effect.
7. **INPUT** input interface, 1/4" mono interface, connect other effects, guitar and other equipment.
8. Pedal switch, press the stomp switch to start working.

V. Technical Parameters

Interface: 1/4" Mono audio interface
Input Impedance: 1MΩ
Power Interface: DC9V 
Size: 108mm(D)x69mm(W)x51mm(H)

Attachment: User manual
Output Impedance: 550Ω
Working current: 17mA
Weight: 249g



MADE IN CHINA