

User Manual

3D DELAY

Thank you for purchasing this product. Please read the user manual carefully before using

I. Precautions


1. Do not disassemble, repair or refit the device to avoid damages.
2. Do not use or put this device under high temperature humidity , or at any place with dirt or violent shaking.
3. Do not drop this device or hit it on the hard surface to avoid damages.
4. Do not clean this device with any detergent or alcohol to avoid damages.
5. Remove the power cable if this device is not used for a long time.
6. Please connect DC9V  with this device.
7. Be sure to turn off the power and other devices before Connecting or disconnecting with this device.

II. Performance Description


1. The 3D DELAY is based on the BBD chip designed for analog delay with warm high frequencies and natural effects. This classic tone is loved by every guitarist who pursues Vintage and is perfect for playing emotional SOLO.
- 2 . Low power consumption current supply.
- 3 . All aluminum metal shell, lightweight and compact.
- 4 . True By pass switching Design .

III. Use Description

- **OUTPUT:** 1/4" mono output interface, connect other effects, amps and other equipment.
- **INPUT:** 1/4" mono input interface, connect other effects, guitars and other devices.

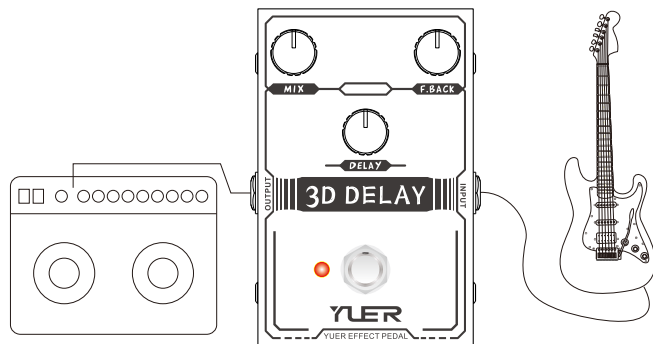

IV. Panel Description

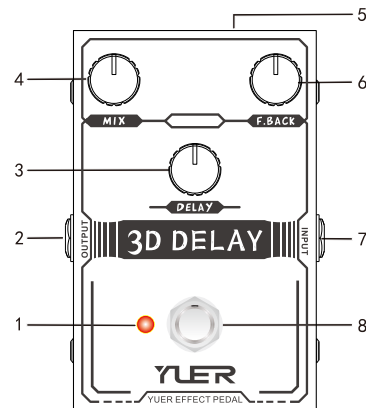

1. LED indicator, the light is on when the device starts to work.
2. **OUTPUT** output interface, 1/4" mono audio interface, connect other effects, speakers and other equipment.
3. **DELAY** knob, Adjusting the delay effect.
4. **MIX** knob, Adjustment of dry mixing ratio effect.
5. Power interface: DC9V (external positive and internal negative).
6. **F.BACK** knob, Adjusting the feedback effect.
7. **INPUT** input interface, 1/4" mono interface, connect other effects, guitar and other equipment.
8. Pedal switch, press the stomp switch to start working.

V. Technical Parameters

Interface: 1/4" Mono audio interface
Input Impedance: 1MΩ
Power Interface: DC9V 
Size: 108mm(D)x69mm(W)x51mm(H)

Attachment: User manual
Output Impedance: 470Ω
Working current: 9mA
Weight: 254g



MADE IN CHINA