

CARL MARTIN



Manual

The CARL MARTIN Boost Kick is a 9V-battery-powered pedal designed to provide up to 12dB of boost to give that extra "kick" required for a great solo.

The level control determines the boost level. The 3 band EQ section is comprised of Punch (bass), Attack (mid) and Edge (treble).

This allows a virtually unlimited range of solo sounds without compromising sonic quality.

Getting your solos to cut through the cacophony of the band can be a handful. With up to 12dB boost and the 3 band EQ at your feet, hitting the right sound at the right level is a breeze.

The CARL MARTIN Boost Kick is true bypass and features an AC adapter jack.

Power Requirements

Battery: The Boost Kick requires a 9V battery. To replace the battery, carefully remove the back panel by loosening and removing the 4 screws, install the new battery and then re-install the back panel.

Power consumption: max. 12 mA




Power supply: 9 V DC (regulated), 50 mA minimum, 2.1 mm female plug, center negative (-)

ATTENTION: Please Use DC Power Supply Only!

Failure to do so may damage the unit and void the warranty.

Specifications

Input.....	1M Ohm
Output.....	100 Ohm
S/N Ratio.....	60dB
Frequency range.....	40Hz-16kHz
Punch (bass).....	+20 40Hz
Attack (middle).....	+20dB 1kHz
Edge (treble).....	+20dB 12kHz
Dimensions	120 (W) x 95 (D) x 56 (H) mm
	4.72" (W) x 3.74" (D) x 2.2" (H)
Weight.....	350g / 0,78lbs

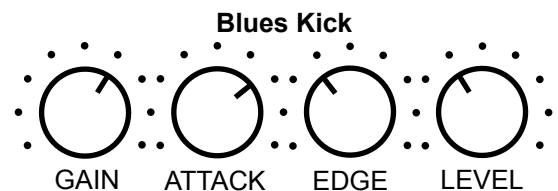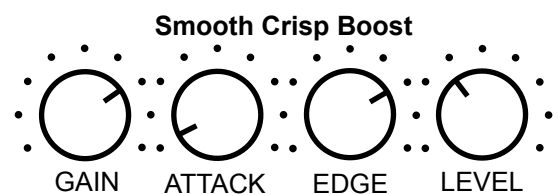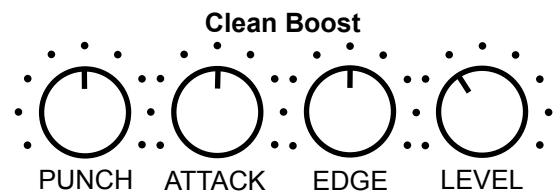

Warranty: Carl Martin Research warrants the manufacturing, material and proper operation for a period of one year from date of purchase. Carl Martin will replace defective parts, make necessary repairs or replace the unit at the discretion of our technicians. The warranty applies only to the original purchaser of this product, and excludes any damage or faulty operation resulting from misuse, neglect or unauthorized service.

HandMade in Denmark

East Sound Research Raadmandsvej 24 8500 Grenaa Denmark Phone: +4586325100

E-Mail: info@carlmartin.com