

D1 MAXVERB

Precautions

PLEASE READ CAREFULLY BEFORE PROCEEDING

Power supply

Please connect the designated AC adapter to an AC outlet of the correct voltage. Please be sure to use only an AC adapter which supplies 9V (+10%) DC, center minus. The maximum working voltage shall not exceed 12V, otherwise may be dangerous equipment damage, fire, or other problems. Unplug the AC power adapter when not using or during electrical storms.

Connections

Always turn off the power of this and all other equipment before connecting or disconnecting, this will prevent malfunction and/or damage to other devices. Also make sure to disconnect all connection cables and the power cord before moving this unit.

Handling

Do not apply excessive force to the switches or controls.

Do not let paper, metallic, or other objects into this unit.

Take care not to drop the unit and do not subject it to shock or excessive pressure.

Cleaning

Clean only with a soft, dry cloth. If necessary, slightly moisten the cloth.

Do not use abrasive cleanser, cleaning alcohol, paint thinners, wax, solvents, cleaning fluids, or chemical-impregnated wiping cloths.

Interference with other electrical devices

Radios and televisions placed nearby may experience reception interference. Operate this unit at a suitable distance from radios and televisions.

Location

To avoid deformation, discoloration, or other serious damage, do not expose this unit to the following conditions:


.Direct sunlight	.Heat sources
.Magnetic fields	.Extreme temperature or humidity
.Excessive dusty or dirty location	.High humidity or moisture
.Strong vibration or shocks	

Main features

- The Max-verb delivers three types of studio quality reverb: SPRING, HALL and PLATE all designed for the discerning guitarist but also great with other

instruments on stage or in the studio. Included a newly designed analog wet/dry control which provides a constant volume curve as you turn the BLEND knob from fully dry to fully wet while also keeping your dry signal analog through the pedal

Panel instruction

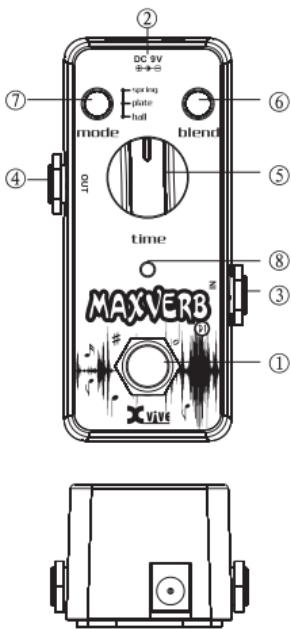

1.TRUE BYPASS Footswitch:

Push down the footswitch to switch between effects and bypass status

2.DC IN Power Jack:

For power supply, use a 9V DC regulated AC adapter(plug polarity is positive on the barrel and negative in the center).

3.INPUT Jack:

1/4" mono audio jack, for connecting guitar.

4.OUTPUT Jack:

1/4" mono audio jack, outputs the signal.

5.Time Knob:

Adjusts the decay time, or reverb length/size, for the SPRING, HALL and PLATE reverb

6.BleND Knob:

Controls the wet/dry mix from 100% Dry (counter-clockwise position) to 100% Wet (clockwise position). As the BLEND knob is turned, the overall output volume remains nearly constant. Your Dry signal remains analog from input to output through the Maxverb.

7.Mode Knob:

Choose the reverb mode. From left to right, the modes are SPRING, HALL, and PLATE

8.The Effect LED:

Indicate the effects is on or off

Specifications

Input: 1/4" monaural jack (impedance: 1M

Output: 1/4" monaural jack(impedance: 150R ohms)

Power Requirements: AC adapter 9V DC (center minus plug)

Current Draw: 65mA

Dimensions:46 (W) *94 (D) *50 (H) mm

Accessories: Owner's manual



www.xviveaudio.com

Disclaimer: Any specification's update won't be amended in this manual